



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number: **0 501 021 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: 28.06.95 (51) Int. Cl.<sup>6</sup>: **E05D 15/50**

(21) Application number: **91120298.4**

(22) Date of filing: **27.11.91**

(54) Apparatus for opening and shutting a lid.

(30) Priority: 25.02.91 JP 15027/91

(43) Date of publication of application:  
02.09.92 Bulletin 92/36

(45) Publication of the grant of the patent:  
28.06.95 Bulletin 95/26

(84) Designated Contracting States:  
DE FR GB

(56) References cited:  
US-A- 2 349 486  
US-A- 3 677 196  
US-A- 4 985 962

(73) Proprietor: Kato Hatsujo Kaisha Ltd.  
51 Iwai-cho  
Hodogaya-ku  
Yokohama-shi  
Kanagawa-ken (JP)

(72) Inventor: Yamada, Satoshi  
18-7, Koyabe 2-chome  
Yokosuka-shi,  
Kanagawa-ken (JP)

(74) Representative: Lewald, Dietrich, Dipl.-Ing. et  
al  
Patentanwalt  
Plenzenauerstrasse 2  
D-81679 München (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

The present invention relates to an article having an opening closable by an element in the form of a lid or door hingeably mounted on said article by means of an apparatus for opening and closing said element selectively in two directions.

For example, an apparatus for opening and shutting an element in the form of a lid of an automobile console box selectively in two directions has been already disclosed in the Japanese Utility Model Public Disclosure No. 60-90042. This conventional apparatus comprises supporting shafts of a circular cross section disposed laterally one each along the opposite sides of the edge of an opening of a box body and bearings of a C-shaped cross section disposed integrally along the corresponding edges of a lid and adapted to be detachably wrapped one each around the supporting shafts so that the opening of the box body can be completely shut with the lid by rotatably wrapping the bearings around the corresponding supporting shafts. The exposure of the opening of the box body is attained either by removing one of the bearings from the corresponding supporting shaft and rotating the lid about the other supporting shaft as a fulcrum or by removing the other bearing from the corresponding supporting shaft and rotating the lid about the other supporting shaft as a fulcrum, thereby revealing the opening of the box body suitably in either of the two directions. In accordance with this conventional apparatus, therefore, the lid provided for the box body can be opened and shut selectively in two directions by adopting the very simple construction having the supporting shafts of a circular cross section disposed on the box body side and the bearings of a C-shaped cross section disposed the lid side.

However, this conventional apparatus thus constructed has a structure fault in that since one of the bearings subjected to an operation of shutting or opening the lid must be forcibly fastened around the corresponding supporting shaft or forcibly relieved of the fastened state and since the other bearing must be immoderately rotated around the corresponding supporting shaft in response to the aforementioned operation, when the opening and shutting motions are frequently repeated, the C-shaped cross sections of the bearings are radially expanded or deformed and eventually prevented from allowing smooth opening and shutting motions or infallibly producing a perfectly open or shut state.

Moreover, US 4,985,962 discloses a device comprising a lid provided on each of the opposite sides thereof with a pair of projecting rods and a housing provided on each of the opposite outer sides thereof at positions corresponding to those of

the rods with a pair of latch sections. With this known construction utilizing the rods and latch sections, the lid can be opened and closed in two directions relative to the housing. The latch section is provided on one of leg pieces thereof with U-shaped latch means having a lock piece formed on the upper end thereof. The housing has a rail which defines a groove therein. The rod is detachably engaged in the groove by means of the lock piece.

Furthermore, from the US 2,349,486 is known a device comprising a lid provided on each of the opposite ends thereof with latch means having a hinge shaft and a lock arm, and a box provided on each of the opposite ends thereof at a position corresponding to that of the latch means with a member having an upper and a lower seat. With this device utilizing the latch means and members, the lid can be opened and closed in two directions relative to the box. The hinge shaft and the lock arm of the latch means are engaged in the upper and the lower seats and of the member, respectively.

In the US 3,677,196 is disclosed a device comprising a lid provided on each of the opposite ends thereof with a plurality of hinge pins disposed at regular intervals, and a body provided on each of the opposite sides thereof at positions corresponding to those of the hinge pins with a plurality of U-shaped operation members movably supported. With this construction utilizing the hinge pins and operation members, the lid can be opened and closed in two directions relative to the body. The operation member is outwardly biased by a spring and, in this state, is accommodated within a housing formed on the body. When the lid is closed relative to the body, an arm of the operation member is engaged with a horizontal rung portion of the hinge pin. This engagement is released by pushing a flunger against the biasing force of the spring, thereby opening the lid relative to the body.

The object of the present invention is to provide an improved article having an opening closably by an element rotatably disposed on said article offering an effective solution to the problems encountered by the known devices.

According to the present invention, this object is achieved by an article having an apparatus for opening and closing an element selectively in two directions comprising a pair of operating members independently movably supported one each at opposite ends of the element; spring means and a pair of shafts connected thereto disposed on an inner side of the element so as to be caused to move apart under the influence of resilient pressure of said spring means, said shafts being connected to said operating members so as to urge said operating members outwardly away from each other by virtue of the resilient pressure of said spring

means; two pairs of storage mouths formed in the edge of the opening at four corner portions thereof; two pairs of lock members pivotally supported inside said storage mouths for detachably supporting said shafts outside of said storage mouths; each of said shafts connected to said operating members being released from said lock members by a pressing operation of the corresponding operating member; two pairs of rotary gear mechanisms attached to said lock members so that each pair of rotary gear mechanisms are interconnected to each other and the two pairs of rotary gear mechanisms are interlocked with each other; and two pairs of gear-shaped ring members disposed on the sides of the element and engaging with respective pairs of the rotary gear mechanisms when the respective shaft is retained in the lock member; whereby the pressing operation of one of said operating members releases the respective shaft from the respective lock member allowing opening of the element in one direction thereby causing one pair of the lock members on the side being opened to be rotated and plunged into the corresponding pair of storage mouths due to the engagement between the other pair of gear-shaped ring members and the respective rotary gear mechanisms and the interlocking between said two pairs of rotary gear mechanisms.

Preferred embodiments of the invention are described in the claims 2 to 4.

The above and other objects, characteristic features and advantages of the present invention will become more apparent to those skilled in the art from the description of the invention made hereinbelow with reference to the accompanying drawings, in which:-

Figure 1 is an exploded perspective view illustrating one embodiment of the lid opening and shutting apparatus according to the present invention,

Figure 2 is a front view illustrating the essential part of a rotary gear mechanism attached to a lock member,

Figure 3 is a side view of the rotary gear mechanism,

Figure 4 is a front view illustrating the state of the apparatus when a lid is shut relative to a box body,

Figure 5 is an enlarged explanatory view illustrating the state in which a rotary shaft of spring means has been released from a lock hole of a lock member,

Figure 6 is an enlarged explanatory view illustrating the state in which a fourth large gear and a first small gear of the rotary gear mechanism are held in a meshed state,

Figure 7 an enlarged explanatory view illustrating the state in which the lock member is rotat-

ed toward a storage mouth,

Figure 8 is an explanatory view illustrating the state in which the lid is opened in one direction, and

Figure 9 is an explanatory view illustrating the state in which the lid is opened in the opposite direction.

Now, the present invention will be described in detail below with reference to the illustrated embodiment.

In the illustrated lid opening and shutting apparatus, an element 1 in form of a lid is rotatably disposed on an article in the form of a body 2 of an automobile console box, for example so that it is opened and shut selectively in two directions. Basically this apparatus adopts substantially the whole construction of the switching device proposed formerly by the present inventor and explained hereinbefore.

To be specific, as illustrated in Figure 1, on the side of the lid 1 the apparatus comprises a depressed part 3 formed in the lid 1, two opposed through holes 4 perforated one each in the opposite terminal walls of the lid 1 defining the depressed part 3, two operating buttons 5 each having a communicating hole 6 and each movably supported in the corresponding through hole 4, rectangular linear spring means 7 provided integrally with a pair of shafts 8 and a pair of resilient parts 9 and disposed in a bent state within the depressed part 3, and collars 10 placed one each around the pair of shafts 8 of the spring means 7 so that the resilient pressure derived from bending of the resilient parts 9 of the spring means 7 urge the operating buttons 5 outwardly away from each other inside the through holes 4. The shafts 8 are idly inserted through the communicating holes 6 of the operating buttons 5.

On the side of the box body 2, the apparatus comprises four metallic lock members 11 each provided with a tapered guide part 12 and an L-shaped lock hole 13 and disposed on the opposite terminal parts of the opposed edges of an opening of the box body 2 so as to form two pairs and so that each of the shafts 8 of the spring means 7 may be detachably fastened to the lock holes 13 of one pair of lock members 11.

In addition to the basic construction described above, the lid opening and shutting apparatus of the present invention comprises four storage mouths 14 bored in the opposite terminal parts of the opposed edges of the opening of the box body 2 and adapted to allow submersion therein or emersion therefrom of the lock members 11, common connecting shafts 15 serving to support the lock members 11 rotatably inside the storage mouths 14 positioned in the terminal parts, and double torsion springs 16 attached to the common

connecting shafts 15, so that the resilient pressure of the torsion springs 16 continues to urge the lock members 11 in the terminal parts upwardly from the storage mouths 14 and, while the lid 1 is being opened, rotates the lock members 11 on the open side through gear mechanisms G to be specifically described hereinbelow and forces them to submerge in the storage mouths 14.

The double torsion springs 16 are so adapted that when the opposite terminal hook parts thereof are directly fastened to the corresponding lock members 11 and the central hook parts thereof are fastened to stationary shafts 17 disposed in parallel to the connecting shafts 15, the torsional resilient pressure produced serves the purpose of keeping the lock members 11 in their raised state at all times. These stationary shafts 17 and the connecting shafts 15 as well as the double torsion springs 16 are kept concealed with suitable means such as covers, for example.

The gear mechanisms G are provided one each for the lock members 11 and those on each side of the box body 2 are interconnected through a rack 25 to be specifically described hereinbelow so as to be driven in cooperation with each other. Each of the gear mechanisms G cooperates with a gear-shaped ring member 18 disposed on the side of the lid 1 and a plurality of gears disposed on the side of the box body 2. The gear-shaped ring members 18 have teeth formed on their own circumferential surfaces and have bored in the central parts thereof oblong holes 19 for allowing the terminals 8a of the pair of shafts 8 to be idly inserted therein. They are integrally projected from the opposed inner surfaces of the depressed part 3 of the lid 1 in the proximity of the terminal parts thereof.

As illustrated in Figures 2 and 3, the gears of each gear mechanism G comprise a first small gear 20 fixed to the terminal part of the connecting shaft 15, a second medium gear 21 meshed with the gear-shaped ring member 18 on the side of the lid 1, a third large gear 22 meshed with the second medium gear 21, a fourth large gear 23 disposed coaxially with the third large gear 22 and being meshed with the first small gear 20 when the lid is opened to a prescribed extent, and a fifth small gear 24 disposed coaxially with the third and fourth large gears 22 and 23. These gears are laid out inside the lateral walls of the box body 2, with the fifth small gears 24 on each side of the box body 2 interconnected with the rack 25. A toothed part 23a is formed only in part of the circumference of the fourth large gear 23 so that the toothed part 23a is meshed with the first small gear 20 as shown in in Figures 6 and 7 at a fixed time interval. The oblong hole 19 formed in the ring member 18 lies in parallel to the longitudinal direction of the lid 1 and also to the direction of motion of the operating

button 5 and further in parallel to the lengthwise direction of the bottom of the L-shaped lock hole 13 of the lock member 11 and has a length roughly equal to the length of the bottom of the L-shaped lock hole 13.

In the lid opening and shutting apparatus, since the operating buttons 5 are movably supported in the corresponding through holes 4 of the lid 1 and the shafts 8 of the spring means 7 are idly inserted in the corresponding communicating holes 6 of the operating buttons 5, the resilient parts 9 of the spring means 7 are bent inwardly inside the depressed part 3 of the lid 1 and the operating buttons 5 are urged outwardly from the through holes 4 by virtue of the resilient pressure generated by the resilient parts 9.

When, in the state described above, the lid 1 is set to cover the opening of the box body 2, the shafts 8 of the spring means 7 are guided and retracted by the corresponding tapered guide parts 12 of the lock members 11 and, on arrival at the L-shaped lock holes 13 of the lock members 11, are automatically locked at the terminal edges thereof. Thus, the lid assumes the state of unfailing closure with respect to the box body as illustrated in Figure 4.

While the lid 1 is kept in the state of closure, the shafts 8 of the spring means 7 serving as axes of rotation are infallibly fastened to the lock holes 13 of the corresponding lock members 11 while being urged by the resilient pressure derived from the bending of the pair of resilient parts 9 of the spring means 7 and, at the same time, the ring members 18 on the side of the lid 1 are meshed with the second medium gears 21 on the side of the box body 2 respectively and consequently positioned safely outside the corresponding lock members 11. Thus, the oblong holes 19 of the ring members 18 are allowed to coincide with the bottoms of the lock holes 13.

When the lid 1 is to be released from the state of closure on the left side in Figure 4, for example, the operating button 5 on the left side accompanied by the shaft 8 of the spring means 7 idly inserted in the communicating hole 6 is pressed inwardly against the resilient pressure and rotated upwardly. As a result, the shaft 8 of the spring means 7 is moved inside the bottoms of the lock holes 13 of the lock members 11 and then moved upwardly as illustrated in Figure 5 and consequently readied for easy separation from the lock holes 13 of the lock members 11.

In this operation for opening the lid 1, the gear-shaped ring members 18 on the open side are disengaged from the second medium gears 21 and put to motion in concert with the rotation of the lid 1 as indicated by the arrow in Figure 5. At this time, the terminals 8a of the shaft 8 are allowed to

move inside the oblong holes 19 of the corresponding ring members 18 and go to aid in the separation of the shaft 8 from the lock holes 13 of the lock members 11. On the open side, therefore, the presence of the gear-shaped ring members 18 has absolutely no possibility of constituting an obstacle.

On the right side now seating the fulcrum of rotation of the lid 1, the gear-shaped ring members 18 on the right side are rotated while being synchronized with the opening motion of the lid 1 so as to rotate the second medium gears 21 meshed with the ring members 18 in a prescribed direction as indicated by an arrow in Figure 4. As a result, when the third large gears 22 meshed with the second medium gears 21 are rotated, the fifth small gears 24 disposed coaxially therewith are rotated in the same direction and the rack 25 meshed with the fifth small gears 24 is consequently moved horizontally in the rightward direction in the bearings shown in Figure 4.

In consequence of the horizontal motion of the rack 25, the fifth small gears 24 on the left side, i.e. on the open side, are rotated in the direction indicated by an arrow in Figure 6 so as to rotate the fourth large gears 23 disposed coaxially therewith in the same direction and, after the lapse of a prescribed time, bring the toothed parts 23a of the fourth large gears 23 into engagement with the first small gears 20 fixed on the connecting shaft 15.

When the upward rotation of the lid 1 around the shaft 8 fastened to the lock members 11 on the right side as a fulcrum is continued further, the lock members 11 on the left side are synchronously rotated gradually in the direction of the respective storage mouths 14 in spite of the resilient pressure of the double torsion spring 16 as illustrated in Figure 7 and are finally submerged completely within the corresponding storage mouths 14 as illustrated in Figure 8. The construction for causing the fourth large gears 23 to be engaged with the first small gears 20 at a fixed time interval is intended to prevent the lock members 11 from being rotated in the direction of the storage mouths 14 until the shafts 8 are completely separated from the lock holes 13 of the lock members 11.

The rotation of the fifth small gears 24 on the open side results in rotation of not only the fourth large gears 23 but also the third large gears 22 disposed coaxially therewith. This operation only keeps the second medium gears 21 in an idling state and has absolutely no bearing on the rotation of the lock members 11.

While the lid 1 is in its completely open state, the lock members 11 on the open side are wholly concealed in the storage mouths 14 as illustrated in Figure 8. Thus, there is precluded the possibility of the lock members protruding upwardly in an erect-

ed state and impairing the attractiveness of the appearance of the lid in an open state as has been experienced in the formerly proposed lid switching device. The apparatus of the present invention has absolutely no possibility of the presence of the lock members 11 constituting an obstacle during the insertion or removal of an object into or from the box body 2.

On the rotary fulcrum side, the shaft 8 fastened with the resilient pressure to the lock members 11 need not be relied on as a sole fulcrum of rotation, because the ring members 18 on the same side are rotated at one same position while being simultaneously meshed with the second medium gears 21, and the lid 1 is consequently rotated stably in the opening direction. The possibility that during the release of the lid 1 from its shut state, the shaft 8 serving as a fulcrum of rotation will accidentally move out of its position and clatter is completely removed. Furthermore, the rotation of the lid 1 and the consequent sympathetic rotation of the ring members 18 entail a gradual change in the direction of the oblong holes 19 in the ring members 18 and disrupt the coincidence between the directions of the oblong holes 19 and the bottoms of the lock holes 13 in the lock members 11 as shown in Figure 8. Even when an external force is exerted accidentally on the operating buttons 5 during the absence of this coincidence, the possibility that the shaft 8 on the rotary fulcrum side will readily separate from the lock holes 13 of the lock members 11 and the lid 1 will consequently break off the box body 2 is completely eliminated by the regulating action of the oblong holes 19 in the ring members 18.

The lid having been opened on the left side is rotated downwardly to be shut. As a result, the ring members 18, second medium gears 21, third large gears 22 and fifth small gears 24 on the rotary fulcrum side are rotated in their respective directions opposite those mentioned in the case of opening the lid on the left side as described above, and the racks 25 are moved in the leftward direction in the bearings shown in Figure 8. Consequently, the fourth large gears 23 and first small gears 20 are disengaged from each other and the lock members 11 are automatically rotated again with the resilient pressure of the double torsion springs 16 and synchronously erected upwardly out of the storage mouths 14 on the open side.

Then, the downward rotation of the lid 1 around the rotary shaft 8 fastened to the lock members 11 on the right side as a fulcrum of rotation is continued. As a result, the shaft 8 of the spring means 7 on the left side collides against the tapered guide parts 12 of the erected lock members 11 and are guided by the guide parts 12 and automatically fastened again to the lock holes 13 of the lock

members 11. Consequently, the lid 1 assumes the same infallibly shut state as described above.

Conversely, for the purpose of opening the lid 1 on the right side in the bearings shown in FIG. 4, the operating button 5 on the right side is depressed inwardly against the resilient pressure accompanied by the shaft 8 of the spring means 7 idly inserted in the communicating holes 6. As a result, the shaft 8 of the spring means 7 is readily removed from the lock holes 13 of the lock members 11 in the same manner as described above. Consequently, the lid 1 can be readily opened from the right side as illustrated in Figure 9 by rotating the lid 1 straight upwardly around the shaft 8 fastened to the lock holes 13 of the lock members 11 on the left side as a fulcrum of rotation.

In this case, the ring members 18 on the left side rotate the second medium gears 21 synchronously with the opening action of the lid 1 on the rotary fulcrum side. As a result, the third gears 22 meshed with the second medium gears 21 are rotated and, at the same time, the fifth small gears 24 disposed coaxially therewith are rotated and the racks 25 meshed with the fifth small gears 24 are consequently moved in the leftward direction in the bearings shown in Figure 9. In consequence of the motion of the racks 25, the fifth small gears 24 on the right side are rotated and the fourth large gears 23 disposed coaxially therewith are rotated in the same direction and, after the lapse of a prescribed time interval, meshed with the first small gears 20 fixed to the connecting shaft 15.

Similarly when the lid 1 is opened on the right side, therefore, the lock members 11 on the open side are gradually rotated in the direction of the storage mouths 14 against the resilient pressure of the double torsion spring 16 while being synchronized with the opening action of the lid 1 and are finally submerged in the corresponding storage mouths 14. While the lid 1 is in the finally open state, the possibility of the lock members 11 protruding upwardly and impairing the attractiveness of the appearance of the apparatus and consequently constituting an obstacle to the insertion or extraction of an object into or from the box body 2 is precluded in the same manner as when the lid 1 is opened on the left side.

Although the gear mechanisms G are provided one each for the lock members 11, the necessity for removing the lid 1 from the box body 2 can be readily fulfilled by simultaneously depressing the two operating buttons 5 inwardly and consequently removing the two shafts 8 of the spring means 7 together from the lock holes 13 of the lock members.

The embodiment described above, for the purpose of promoting structural simplicity, has the shafts disposed integrally in the opposite lateral

parts of the rectangular spring means 7 to serve concurrently as fulcras of rotation of the lid. Optionally, these shafts may be formed separately of the spring means.

Furthermore, the present embodiment has been described as applied to the lid for an automobile console box. The present invention is not limited to this particular application, but may be easily practised otherwise without departing from the scope of the claims and without reference to the designation of the subject matter of application as in various lids and doors including refrigerator doors, on the sole condition that the lid or door should be capable of being opened or shut in two directions.

Owing to the adoption of the construction described above, the present invention enables the lid disposed rotatably on the opening of the box body to be opened or shut selectively in two directions. Thus, the present invention ensures that the lid always produces an infallible opening or shutting motion with a click and assumes a safe open or shut state. Even if the opening and shutting operations of the lid is frequently repeated, the present invention is free from the possibility of eventually failing to meet the expectation of a smooth opening or shutting motion or an infallible open or shut state as experienced with the conventional apparatus.

Moreover, in the present invention, owing to the construction having the lock members rotatably supported in place in the storage mouths dug in the box body and the gear mechanisms for rotation provided one each for the lock members supported pivotally in the storage mouths so that the gear mechanisms are interconnected to each other, the lock members on the open side can be rotated and automatically submerged inside the storage mouths by the synchronized drive of the gear mechanisms on the rotary fulcrum side and the gear mechanisms on the open side without reference to the choice of the direction for opening the lid. During the release of the lid from its shut state, therefore, the possibility of the lock members protruding upwardly, impairing the attractiveness of the appearance of the apparatus and constituting an obstacle to the insertion or extraction of an object into or from the box body is completely eliminated.

#### Claims

1. Article having an opening closable by an element in the form of a lid or door hingeably mounted on said article by means of an apparatus for opening and closing said element (1) selectively in two directions, comprising:
  - a pair of operating members (5) independently movably supported one each at opposite ends of the element;

spring means (7) and a pair of shafts (8) connected thereto disposed on an inner side of the element so as to be caused to move apart under the influence of resilient pressure of said spring means, said shafts being connected to said operating members so as to urge said operating members outwardly away from each other by virtue of the resilient pressure of said spring means;

two pairs of storage mouths (14) formed in the edge of the opening at four corner portions thereof;

two pairs of lock members (11) pivotally supported inside said storage mouths for detachably supporting said shafts outside of said storage mouths;

each of said shafts connected to said operating members being released from said lock members by a pressing operation of the corresponding operating member;

two pairs of rotary gear mechanisms (G) attached to said lock members so that each pair of rotary gear mechanisms are interconnected to each other and the two pairs of rotary gear mechanisms are interlocked with each other; and

two pairs of gear-shaped ring members (18) disposed on the sides of the element and engaging with respective pairs of the rotary gear mechanisms when the respective shaft is retained in the lock member;

whereby the pressing operation of one of said operating members releases the respective shaft from the respective lock member allowing opening of the element in one direction thereby causing one pair of the lock members on the side being opened to be rotated and plunged into the corresponding pair of storage mouths due to the engagement between the other pair of gear-shaped ring members and the respective rotary gear mechanisms and the interlocking between said two pairs of rotary gear mechanisms.

2. Article according to claim 1, wherein each gear-shaped ring member (18) comprises teeth formed on its circumferential surface and an oblong hole (19) bored in its central part for allowing a terminal (8a) of said shaft (8) to be idly inserted therein.

3. Article according to claim 1 or 2, wherein said two pairs of rotary gear mechanisms (G) each comprise a plurality of gears disposed on the side of the article (2), said plurality of gears comprising a first small gear (20) fixed to the terminal part of said connecting shaft, a second medium gear (21) meshed with said gear-

shaped ring member, a third large gear (22) meshed with said second medium gear, a fourth large gear (23) disposed coaxially with said third large gear and being meshed with said first small gear when the element (1) is opened to a prescribed extent, and a fifth small gear (24) disposed coaxially with said third and fourth large gears and being interconnected to each other with a rack (25).

4. Article according to claim 3, wherein said fourth large gear has a toothed part (23a) formed in part of its circumference so that said toothed part is meshed with said first small gear at a fixed time interval.

#### Patentansprüche

1. Artikel mit einer durch ein Element in Form eines Deckels oder einer Tür schließbaren Öffnung, wobei erstere scharnierartig auf diesem Artikel mittels einer Vorrichtung zum Öffnen und Schließen dieses Elementes (1) selektiv in zwei Richtungen gelagert sind, umfassend:

ein Paar von Betätigungselementen (5), die unabhängig beweglich jeweils eines auf gegenüberliegenden Enden des Elementes abgestützt sind;

Federmittel (7) und ein Paar von hiermit verbundenen Wellen (8), die auf einer Innseite des Elements angeordnet sind, so daß sie veranlaßt werden, unter dem Einfluß von Federdruck dieser Federmittel sich voneinander wegzubewegen, wobei diese Wellen mit diesen Betätigungselementen derart verbunden sind, daß diese Betätigungselemente nach außen voneinander fort aufgrund des Federdrucks dieser Feder beaufschlagt werden;

zwei Paar von Lagerungsöffnungen (14), die im Rand der Öffnungen an vier Eckbereichen hiervon ausgebildet sind;

zwei Paar von Schließelementen (11), die verschwenkbar innerhalb dieser Lagerungsöffnungen abgestützt sind, um lösbar diese Wellen außerhalb dieser Lagerungsöffnungen zu tragen;

wobei jede dieser mit diesen Betätigungselementen verbundenen Wellen von diesen Sperrelementen aufgrund eines Druckvorgangs des entsprechenden Betätigungselements freigegeben wird;

zwei Paar von Drehgetriebemechanismen (G), die an den Sperrelementen befestigt sind, so daß jedes Paar von Drehgetriebemechanismen miteinander verbunden sind und die beiden Paare von Drehgetriebemechanismen bezüglich einander verblockt sind; und

zwei Paar von getrieberadförmigen Ring-

elementen (18), die auf den Seiten des Elements angeordnet sind und mit jeweiligen Paaren von Drehgetriebemechanismen kämmen, wenn die jeweilige Welle in dem Sperrelement gehalten ist;

wodurch der Preßvorgang eines der Betätigungselemente die jeweilige Welle von dem jeweiligen Sperrelement freigibt und ein Öffnen des Elements in der einen Richtung zuläßt, wodurch veranlaßt wird, daß ein Paar der Sperrelemente auf der Seite, die geöffnet wird, veranlaßt wird, gedreht zu werden und in das entsprechende Paar von Lagerungsöffnungen aufgrund des Eingriffs zwischen dem anderen Paar von getrieberadförmigen Ringelementen und den jeweiligen Drehgetriebemechanismen und der Verriegelung zwischen diesen Paaren von Drehgetriebemechanismen zu tauchen.

2. Artikel nach Anspruch 1, wobei jedes getrieberadförmige Ringelement (18) auf seiner Umfangsfläche ausgebildete Zähne sowie ein längliches Loch (19) umfaßt, das in seinen zentralen Teil gebohrt ist, um zu ermöglichen, daß ein Ende (8a) dieser Welle (8) lose hierin eingeführt wird.
3. Artikel nach Anspruch 1 oder 2, wobei diese beiden Paare von Drehgetriebemechanismen (G) jeweils eine Vielzahl von auf der Seite des Artikels (2) angeordneten Getrieberäder umfassen, wobei diese Vielzahl von Getrieberädern ein erstes kleines Getrieberad (20) umfaßt, das an den Endteil dieser Verbindungswelle befestigt ist, ein zweites mittleres Getrieberad (21), das mit diesem getrieberadförmigen Ringelement kämmt, ein drittes große Getrieberad (22), das mit diesem zweiten mittleren Getrieberad kämmt, ein viertes großes Getrieberad (23), das coaxial zu diesem dritten großen Getrieberad angeordnet ist und mit diesem ersten kleinen Getrieberad kämmt, wenn das Element (1) um ein vorbestimmtes Ausmaß geöffnet wird, sowie ein fünftes kleines Getrieberad (24), das coaxial zu diesen dritten und vierten großen Getrieberädern angeordnet ist und wobei deren Verbindung miteinander über eine Zahnstange (25) erfolgt.
4. Artikel nach Anspruch 3, wobei dieses vierte große Getrieberad einen gezahnten Teil (23a) aufweist, der in Teil seines Umfangs derart ausgebildet ist, daß dieser gezahnte Teil mit diesem ersten kleinen Getrieberad unter einem festgelegten Zeitintervall kämmt.

## Revendications

1. Article ayant une ouverture fermable par un élément sous la forme d'un couvercle ou d'une porte monté de façon pivotante sur ledit article au moyen d'un dispositif pour l'ouverture et la fermeture dudit élément (1) sélectivement dans deux directions, comprenant :

deux organes de manoeuvre (5) supportés indépendamment de façon mobile, un à chacune des extrémités opposées de l'élément ;

des moyens élastiques (7) et deux arbres (8) reliés à ces derniers et placés sur une face intérieure de l'élément de façon à tendre à s'écarter l'un de l'autre sous l'influence de la force élastique desdits moyens élastiques, les dits arbres étant reliés auxdits organes de manoeuvre de façon à tendre à éloigner lesdits organes de manoeuvre l'un de l'autre vers l'extérieur sous l'action de la force élastique desdits moyens élastiques ;

deux paires de mortaises de réception (14) ménagées dans le bord de l'ouverture, à ses quatre angles ;

deux paires de verrous (11) supportés de façon pivotante à l'intérieur desdites mortaises de réception, pour supporter de façon séparable lesdits arbres à l'extérieur desdites mortaises ;

chacun desdits arbres reliés auxdits organes de manoeuvre étant libéré desdits verrous par une opération de pression sur l'organe de manoeuvre correspondant ;

deux paires de mécanismes à engrenages rotatifs (G) associées auxdits verrous de sorte que les deux mécanismes à engrenages rotatifs de chaque paire sont mutuellement interconnectés et que les deux paires de mécanismes à engrenages rotatifs sont mutuellement interconnectées ; et

deux paires d'anneaux à denture d'engrenage (18) disposées sur les côtés de l'élément et engrenant avec les paires respectives des mécanismes à engrenages rotatifs lorsque l'arbre respectif est retenu dans le verrou ;

de sorte que l'opération de pression sur un desdits organes de manoeuvre libère l'arbre respectif du verrou respectif et permet l'ouverture de l'élément dans une direction, ce qui provoque le pivotement d'une paire des verrous, du côté ouvert, et l'enfoncement de cette paire de verrous dans la paire correspondante de mortaises de réception, du fait de l'engrènement entre l'autre paire d'anneaux à denture d'engrenage et les mécanismes à engrenages rotatifs respectifs et de l'interconnexion entre lesdites deux paires de mécanismes à engrenages rotatifs.



2. Article suivant la revendication 1, dans lequel chaque anneau à denture d'engrenage (18) comprend des dents formées sur sa surface circonférentielle et un trou oblong (19) percé dans sa partie centrale pour permettre l'insertion avec jeu d'une extrémité (8a) dudit arbre (8) dans ce trou. 5
3. Article suivant la revendication 1 ou 2, dans lequel lesdites deux paires de mécanismes à engrenages rotatifs (G) comprennent chacune une pluralité de pignons disposés du côté de l'article (2), ladite pluralité de pignons comprenant un premier petit pignon (20) fixé à l'extrémité dudit arbre de liaison, un deuxième pignon moyen (21) qui engrène avec ledit anneau à denture d'engrenage, un troisième grand pignon (22) qui engrène avec ledit deuxième pignon moyen, un quatrième grand pignon (23) disposé coaxialement avec ledit troisième grand pignon et qui engrène avec ledit premier petit pignon lorsque l'élément (1) est ouvert à un degré prescrit, et un cinquième petit pignon (24) disposé coaxialement avec lesdits troisième et quatrième grands pignons, lesdits cinquièmes petits pignons étant mutuellement interconnectés par une crémaillère (25). 10 15 20 25
4. Article suivant la revendication 3, dans lequel ledit quatrième grand pignon comporte une partie dentée (23a) formée sur une partie de sa circonférence, de sorte que ladite partie dentée engrène avec ledit premier petit pignon à un intervalle de temps déterminé. 30 35

40

45

50

55

FIG. 1

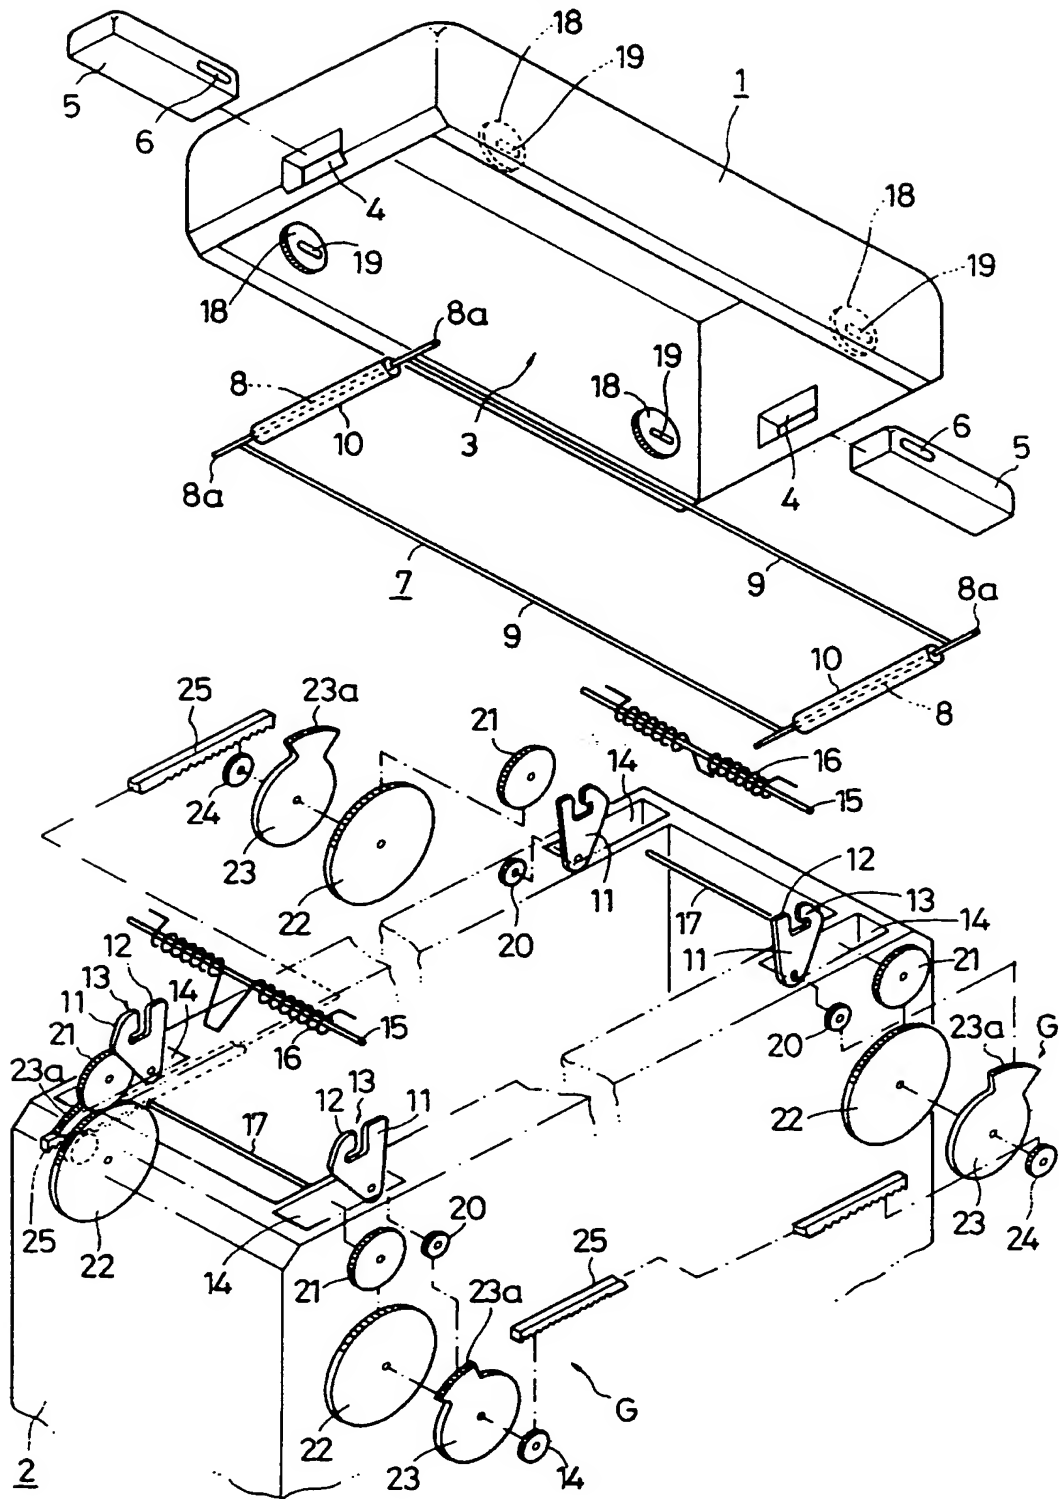


FIG. 2

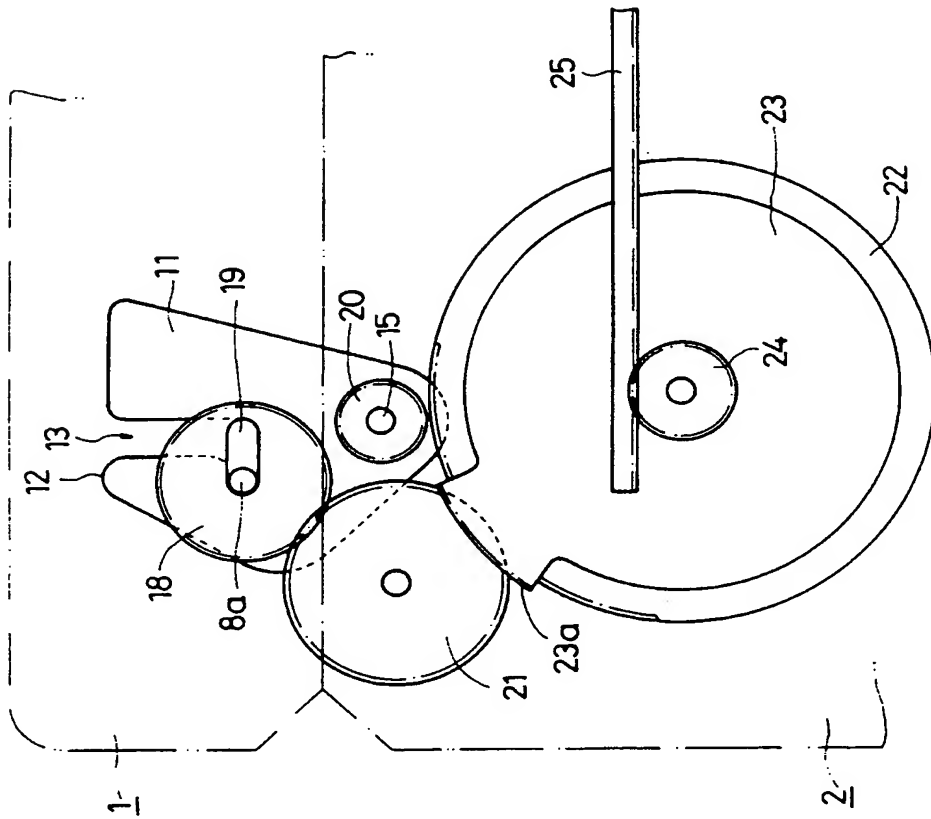


FIG. 3

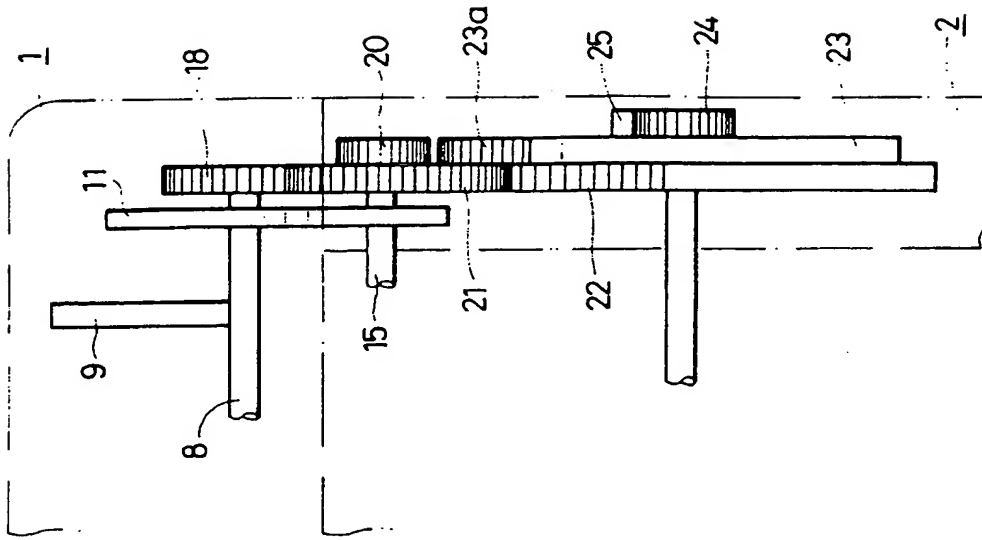


FIG. 4

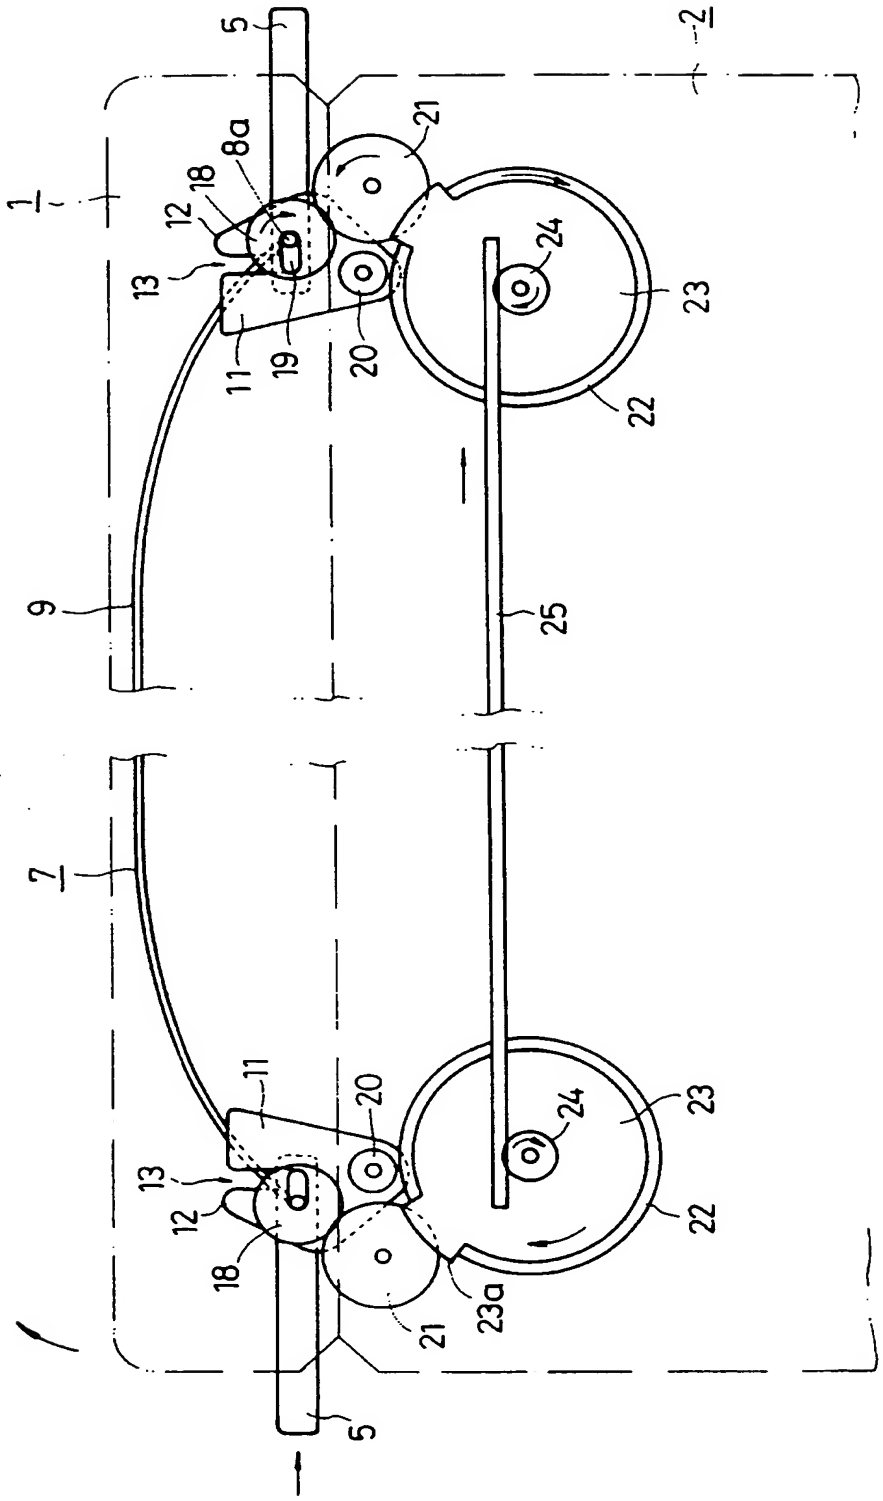


FIG. 5

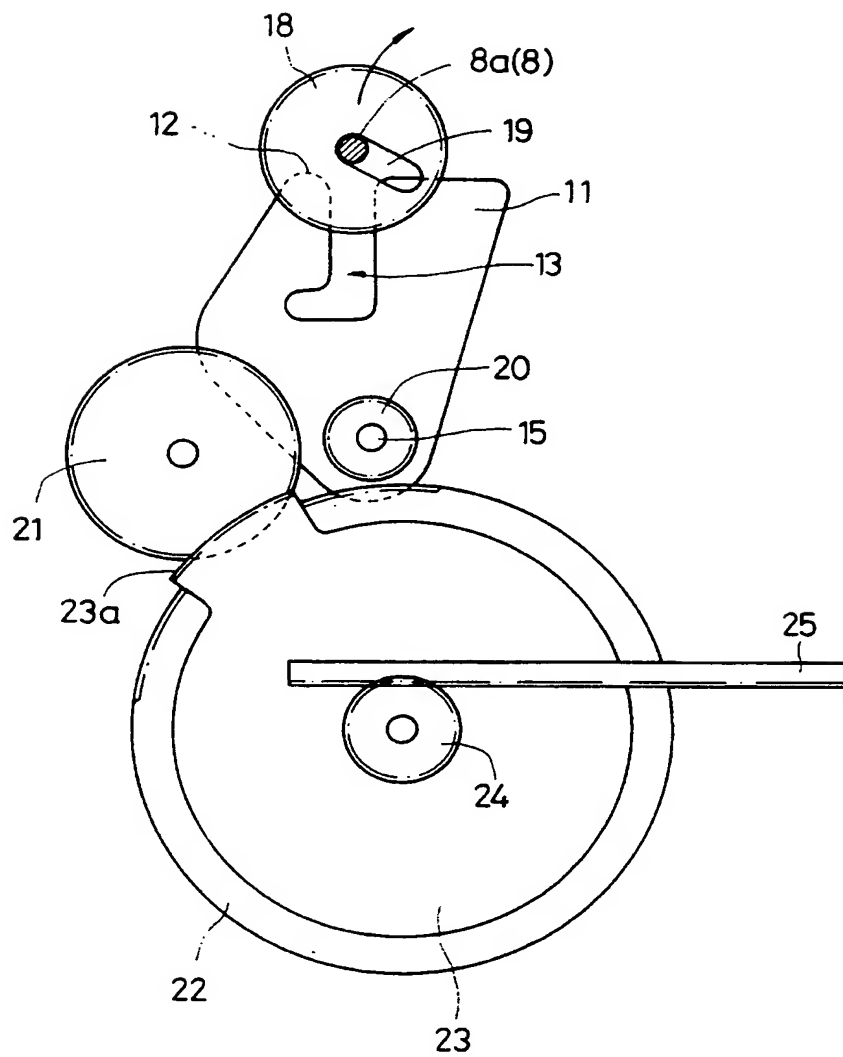


FIG. 6

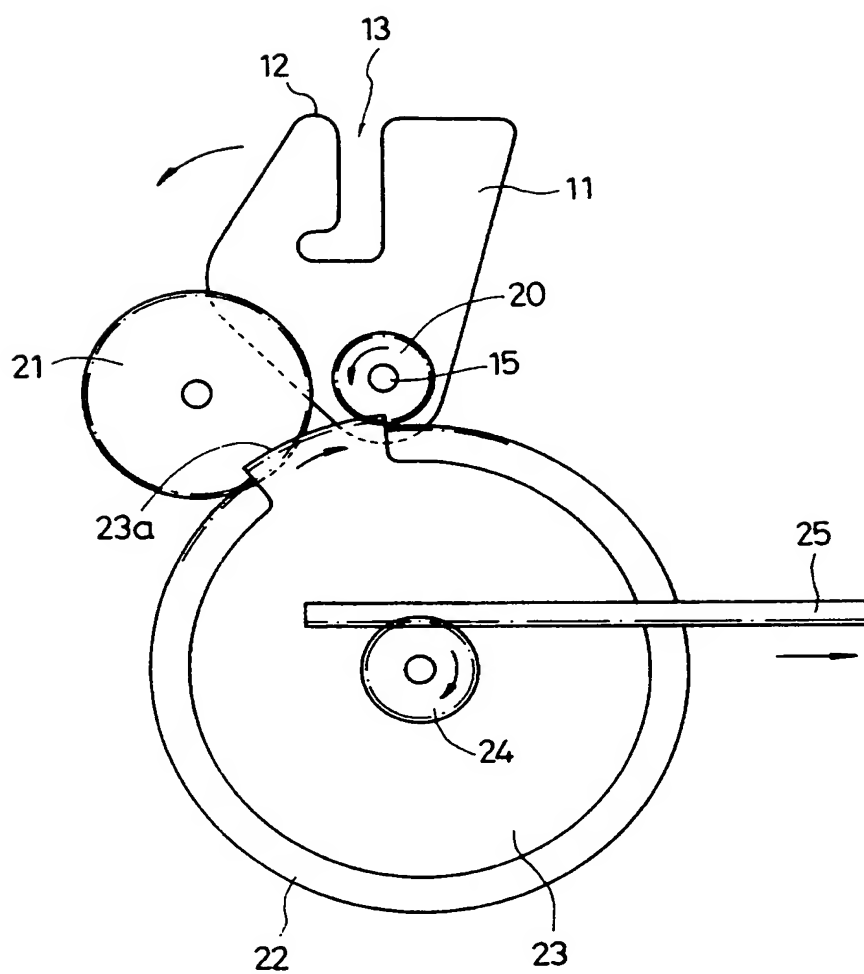
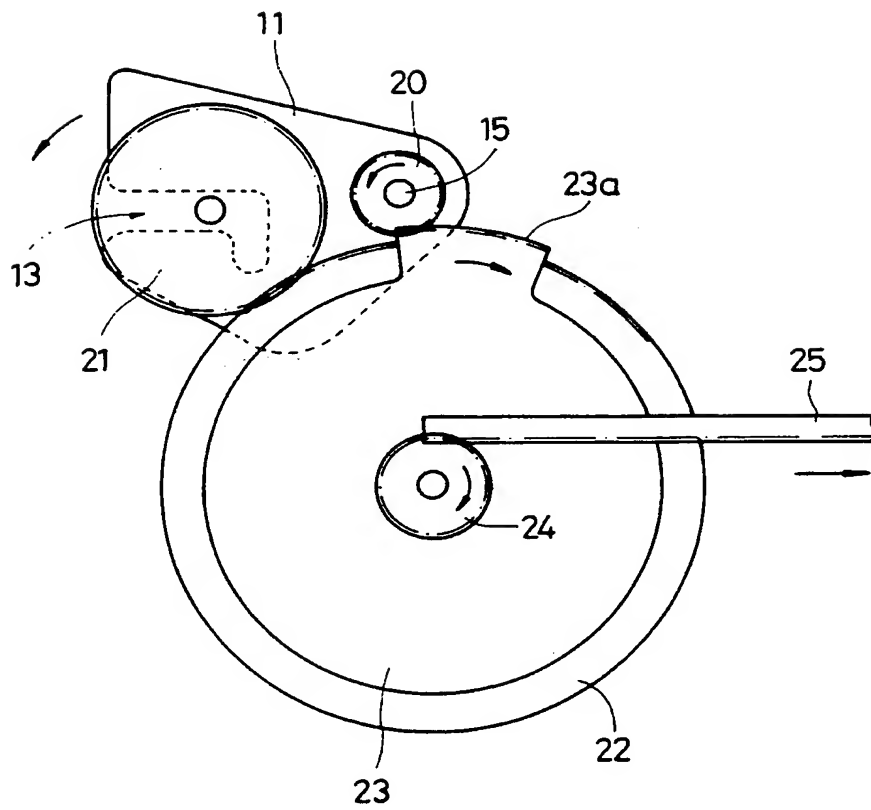


FIG. 7




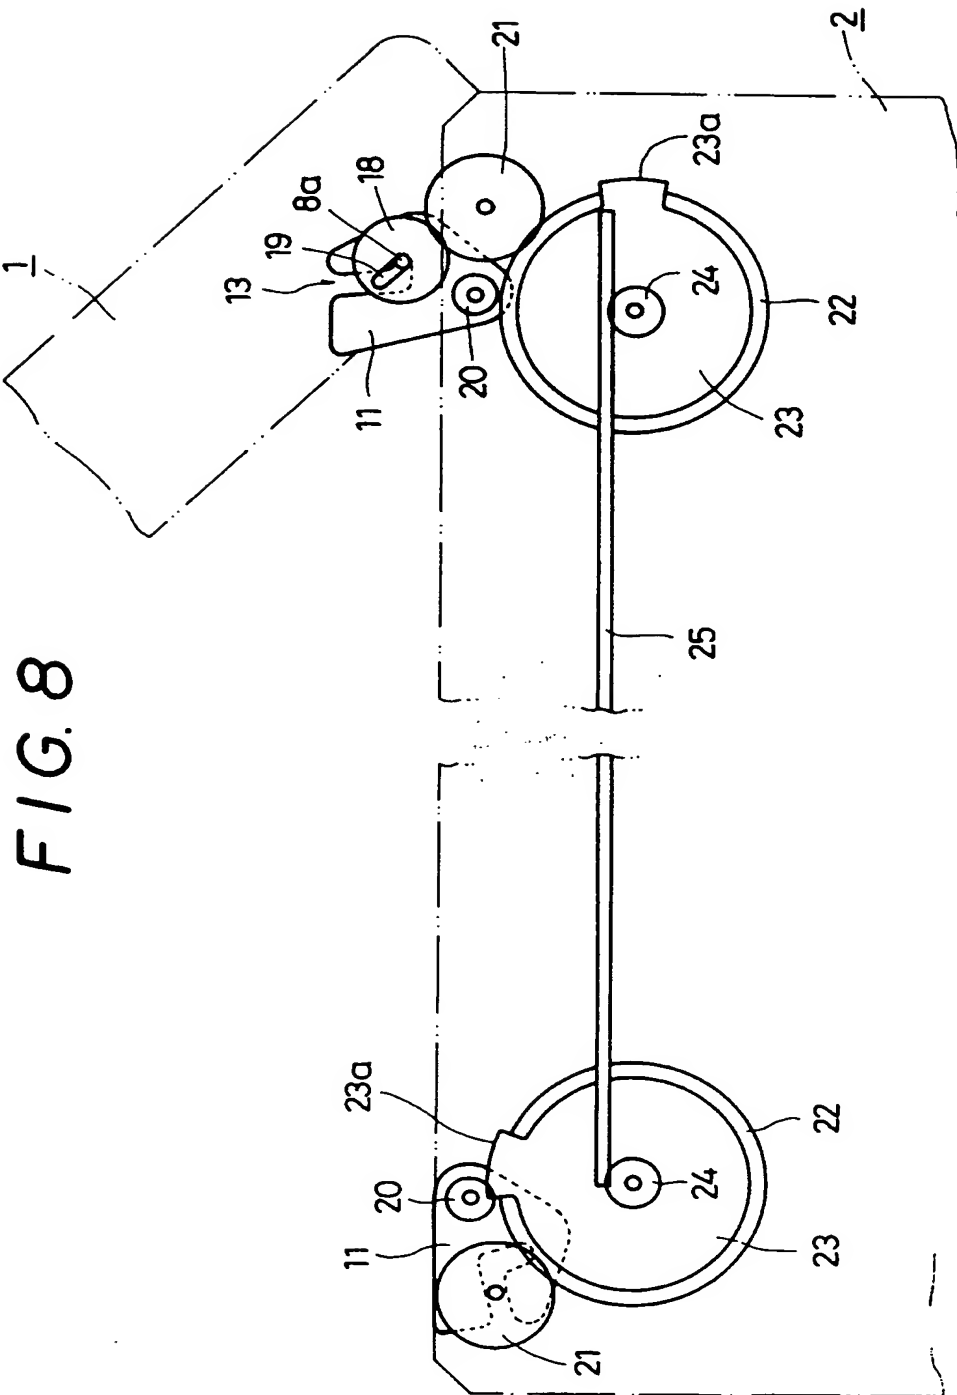


FIG. 8



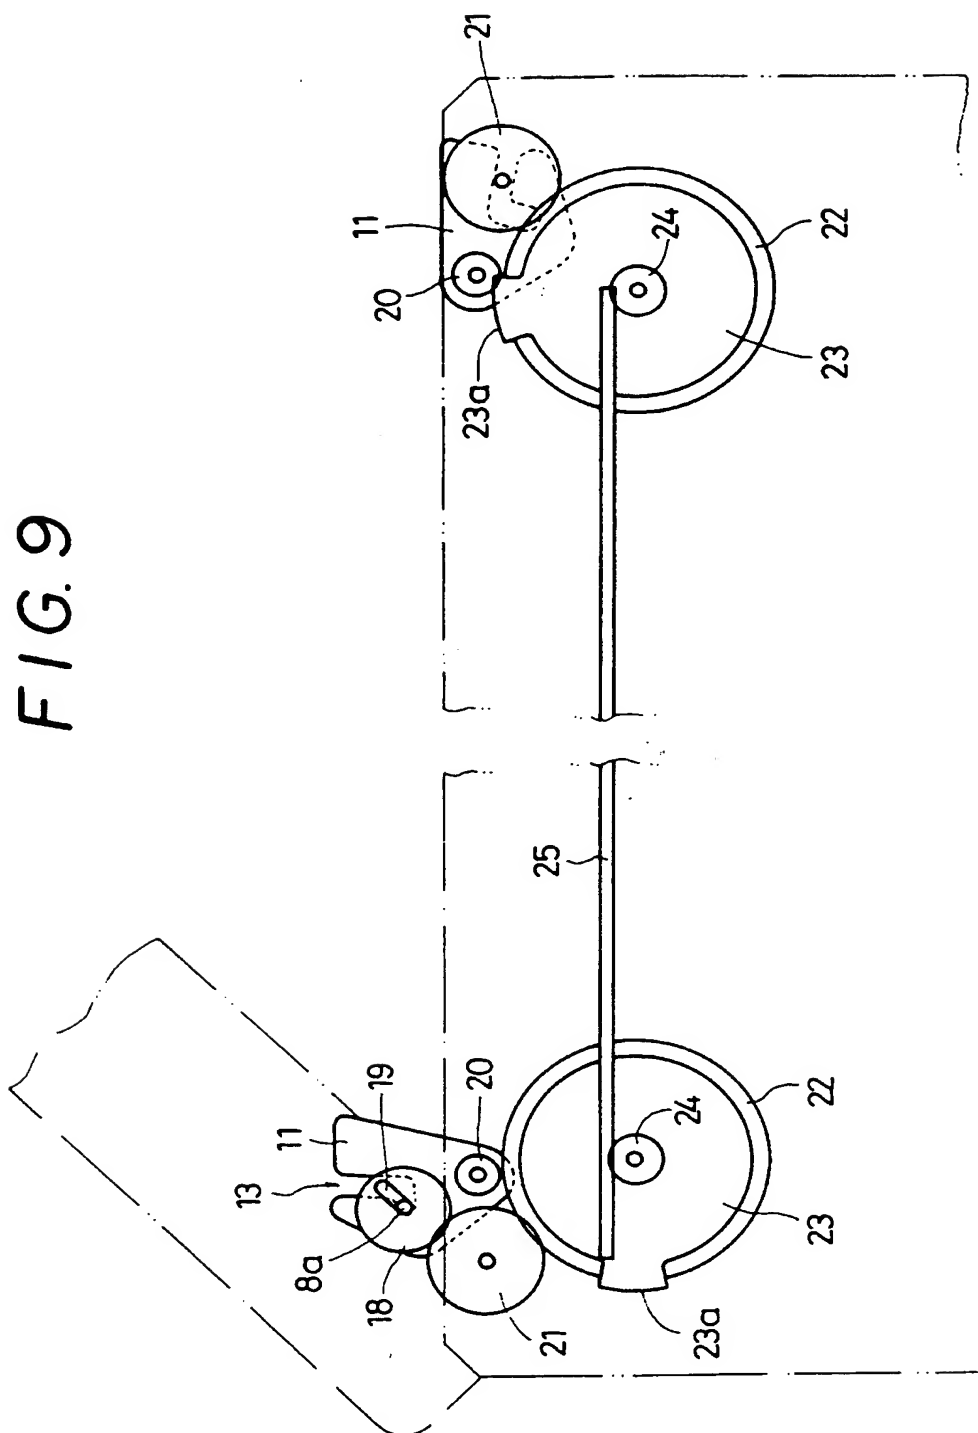

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**